

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
11 October 2001 (11.10.2001)

PCT

(10) International Publication Number
WO 01/74960 A2

(51) International Patent Classification⁷: **C09J 11/00**

(21) International Application Number: **PCT/US01/10287**

(22) International Filing Date: **30 March 2001 (30.03.2001)**

(25) Filing Language: **English**

(26) Publication Language: **English**

(30) Priority Data:
60/193,971 31 March 2000 (31.03.2000) US
09/716,067 17 November 2000 (17.11.2000) US

(71) Applicant (for all designated States except US): **ISOLA LAMINATE SYSTEMS, CORP.** [US/US]; 230 N. Front Street, P.O. Box 1448, LaCrosse, WI 54602 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **CHOATE, Martin, T.** [US/US]; 1500 Rambler Court, Onalaska, WI 54650

(US). **ORMOND, Barbara** [US/US]; 1326 Adams Street, LaCrosse, WI 54601 (US). **NEHLS, Michael** [DE/DE]; Putzstrasse 4, 52399 Mezenich (DE). **CZERNY, Georg** [DE/DE]; Merianstrasse 18, 52351 Duren (DE).

(74) Agent: **HUGHES, A., Blair**; McDonnell Boehnen Hulbert & Berghoff, 300 S. Wacker Drive, Suite 3200, Chicago, IL 60606 (US).

(81) Designated States (national): **CN, NO, SG, US.**

(84) Designated States (regional): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).

Published:

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **HALOGEN FREE FLAME RETARDANT ADHESIVE RESIN COATED COMPOSITE**

(57) Abstract: Fire resistant adhesive resins that include a halogen-free and bromine-free flame retardant ingredient and conductive foils coated with the halogen-free fire resistant adhesive resin coated compositions of this invention as well as printed circuit boards manufactured using the adhesive resin coated conductive foils.

WO 01/74960 A2

HALOGEN FREE FLAME RETARDANT ADHESIVE RESIN COATED COMPOSITE

5

BACKGROUND OF THE INVENTION

(1) Field of the Invention

This invention concerns fire resistant adhesive resins that include a halogen-free and
10 bromine-free flame retardant ingredient. This invention also includes conductive foils coated with the halogen-free fire resistant adhesive resin coated compositions of this invention as well as printed circuit boards manufactured using the adhesive resin coated conductive foils.

(2) Description of the Art

15 Prepregs, resin coated conductive foils, reinforced cores, and other substrates used in the manufacture of circuit boards typically include a resin component. Many of the resin ingredients are flammable. Therefore, flame-retardant ingredients are added to resins prior to use in order to produce flame retardant circuit board substrates and laminates. Commonly used flame retardant components are those that include a halogen such as bromine.

20 The use of halogen containing flame-retardant compounds in circuit board substrate resin formulations may create problems with disposal of used circuit board components. There is some concern that halogens such as bromine compound can leach from circuit board components following disposal in landfills. Therefore, there is a need for adhesive resin formulations that include a halogen free flame-retardant. In addition to being halogen
25 free, there is a need for retardant fire resistant halogen-free adhesive resin compositions that produce circuit board substrate materials with high Tg's, low Dk's and low moisture absorption properties.

SUMMARY OF THE INVENTION

It is an object of this invention to provide a resin composition that includes a halogen free flame retardant composition. The composition is specifically formulated to chemically interact with surrounding thermoset resin matrix components to hasten curing kinetics (peak
5 exotherm temperature) while preserving most of the system latency and to react with the resin ingredients to become an integral part of the cured resin backbone matrix. This feature of the compositions of the present invention enhances the 1-step or 2-step manufacturing process described below and helps to minimize resin movement through faster C-staging and increased production rates.

10 It is another object of this invention to provide a conductive metal foil that is coated with a resin composition that includes a halogen free flame retardant composition wherein the resin coated conductive foil has good peel strengths.

It is still another object of this invention to provide resin coated conductive metal foils that are useful in the manufacture of circuit boards and other electronic laminates.

15 In one embodiment, this invention is a flame-retardant adhesive resin composition comprising at least one resin, and at least one halogen-free flame retardant composition wherein the resin composition includes essentially no halogen containing flame-retardant compositions.

20 In another embodiment, this invention is a flame-retardant adhesive resin composition wherein the halogen-free flame retardant ingredient is melamine cyanurate.

In still another embodiment, this invention is a flame-retardant adhesive resin composition wherein the halogen-free flame retardant ingredient is aluminum trihydrate.

In yet another embodiment, this invention is a conductive metal foil having a first surface and a second surface wherein the first surface includes a flame-retardant resin layer

comprising at least one resin, and at least one halogen-free flame retardant composition wherein the resin composition includes essentially no halogen containing flame-retardant compositions.

DESCRIPTION OF THE FIGURES

Figure 1 is a plot comparing the peel strengths of copper foils coated with bromine containing resins with copper foils coated with resin including at least one halogen-free flame retardant as described in Table 3 of Example 2.

DESCRIPTION OF THE CURRENT EMBODIMENT

The present invention relates to adhesive resin compositions that include at least one halogen-free flame retardant ingredient. The present invention also includes preregs, resin coated conductive foils, cores, and other electronic substrates and laminates that are useful in the manufacture of printed circuit boards that are manufactured from adhesive resin compositions of this invention.

The term "resin" as it is used herein has two meanings. First the term "resin" refers to discrete polymerizable compounds such as epoxy compounds, urethane compounds, and so forth. The term "resin" also refers to a mixture of ingredients including specific resin compounds that is used preferably as a conductive foil "adhesive".

Resins that are useful in the adhesive resin compositions of this invention may be any resin(s) that are useful in the manufacture of adhesive resin coated metal foils. Preferably, the resins are organic resin that have molecular weight greater than about 4500. The adhesive resin composition may include a combination of two or more resin compounds having the same or differing molecular weights and degrees of functionality. Two or more

resins, having the same or different functionality and molecular weights can be advantageously combined in a formulation that results in a cured resin having a high Tg, and low Dk.

The resins used in the adhesive resin compositions of this invention will preferably be heat activated and the adhesive resin compositions will preferably have a viscosity range from about 900 to 2000 centipoise and preferably from about 1200 to about 1700 centipoise. The viscosity can be modified by altering the solids content or the resin ingredients used in the adhesive resin composition.

Examples of useful resins include bistriazine resins, phenoxy resins, bis-phenol epoxy resins, phenolic novolac resins, epoxidised phenolic novolac resins, urethane resins, polyvinyl acetate resins, and any other resins that alone or in combination are within the knowledge of one of ordinary skill in the art as useful in adhesive resin compositions. Further examples of useful resin and resin ingredients are disclosed in U.S. Patent Nos 5,674,611, 5,629,098, and 5,874,009, the specifications of each of which are incorporated herein by reference.

An important ingredient of the adhesive resin compositions of this invention is a halogen-free flame retardant ingredient. The halogen-free flame retardant component may be any halogen-free composition that reduces the flammability of the resin compositions of this invention. Examples of useful halogen-free fire retardant compositions include melamine cyanurate, melamine cyanurate encapsulated red phosphorous, phosphoric acid, 1,3-phenylenetetraphenyl ester, Di-polyoxyethylene, hydroxymethylphosphonate, aluminum trihydrate and mixtures thereof. One preferred halogen-free flame retardant is melamine cyanurate. Another preferred halogen-free flame retardant is aluminum trihydrate.

The particle size of the melamine cyanurate should range from about 1 to about 20

microns. However, a melamine cyanurate particle size less than about 12 microns is preferred. Keeping the melamine cyanurate particle size less than 4 microns minimizes surface defects and resin wet-out problems.

When the flame retardant chosen is aluminum trihydrate, then the average (mean) particle size of aluminum trihydrate will range from about 0.1 to about 20 microns with an average particle size range of from about 1 to about 10 microns, being preferred. More preferably the aluminum trihydrate will have an average particle size of about 1.5 to about 2.0 microns with an average particle size of about 1.8 microns being most preferred. A particularly useful aluminum trihydrate composition has the following formula $Al_2O_3 \cdot x \cdot nH_2O$ where n ranges between about 2.4 to about 3, more preferably between about 2.6 to 2.9 and most preferably about 2.7.

Generally, the resin compositions of this invention will include from about 10 to 40 wt % of a halogen-free flame retardant composition and from about 70 to 90 wt % of one or more resin compounds. More preferably, the adhesive resin compositions of this invention will include from about 10 to about 35 wt % of one or more halogen-free flame retardant compounds. When the flame retardant composition is melamine cyanurate, then it is preferred that the resin will include from about 12 to about 17 wt % melamine cyanurate with the remainder being one or more resin compounds. When the flame retardant composition is aluminum trihydrate, then it is preferred that the resin composition will include from 20 to 30 and most preferably from 23 to 28 wt % aluminum trihydrate with the remainder of one or more resin compound and additives.

The mechanical and electrical properties of the resin compositions of this invention upon cure can be controlled somewhat by choice of the molecular weight of ingredients used in the adhesive resin composition of this invention. When phenoxy resin is used, the

molecular weight should range from about 8000 to about 60,000 and preferably could be about 20,000.

The adhesive resin-compositions of this invention may include other ingredients and additives known to those of ordinary skill in the art to be useful in adhesive resin compositions.

The adhesive resin compositions of this invention are particularly useful in preparing resin coated conductive foils, cores, and other substrates and laminates used in the manufacture of printed circuit boards. Most preferably, the adhesive resin composition of this invention are used in the manufacture resin coated conductive foils and, in particular, resin coated copper foils. Resin coated copper foils are manufactured by applying a layer of resin of this invention to one surface of a two surface conductive foil. Preferably, the thickness of resin applied to the foil surface produces a cured resin thickness of about 20 to about 100 microns. More preferably, the resin is applied in a layer having a cured thickness of about 30 to about 80 microns and most preferably from about 20 to about 50 microns. After coating with adhesive resin, the resin coated copper is then partially cured or b-staged. In an optional step, a second layer of resin may be applied to the surface of the b-staged resin layer. If a second layer of resin is applied, then the second layer of resin is b-staged during which time the first layer typically becomes essentially fully cured. The final product is an adhesive resin coated conductive coated metal foil that is useful in standard printed circuit board manufacturing techniques.

EXAMPLE 1

Two resin compositions, the first including a bromine-containing fire retardant Composition I (Table I) and two including a halogen free fire-retardant Compositions II (Table II) and III (Table III) were prepared according to the recipes set forth in the Tables below.

Table 1

INGREDIENT DESIGNATION	INGREDIENT NAME	1000 PART FORMULA	WT%
BT2110	Bistriazine Resin (Mitsubishi)	390.60	39.06
Quatrex	Brominated Flame Retardant	153.07	15.31
PKHS-40	Phenoxy resin (40% solids – M.W. @ 20,000) – Used as a flexibilizer/resin	229.76	22.98
EPON 1031A70	Bis-Phenol-A epoxy resin	19.13	1.91
EPN 1138MAK80	Epoxidized phenolic novolac resin	134.19	13.42
DER 732	Epoxy resin	38.25	3.83
PKHP-200	Solid phenoxy resin (M.W. @20,000)	30.63	3.06
BYK-341 (optional)	Silicon based surfactant	2.91	0.29
L122 (optional)	fatty acid surfactant	1.46	0.15

Table 2

INGREDIENT DESIGNATION	INGREDIENT NAME	1000 PART FORMULA	Wt%
			NET WEIGHT
BT2110	Bistriazine Resin (Mitsubishi)	390.60	39.1
PKHS-40	Phenoxy resin (40% solids – M.W. @ 20,000) – Used as a flexibilizer/resin	224.12	22.4
EPON 1031A70	Bis-Phenol-A epoxy resin	19.13	1.9
EPN 1138MAK80	Epoxidized phenolic novolac resin	134.19	13.4
DER 732	Epoxy resin	38.25	3.8
Melamine cyanurate	Halogen-free flame retardant	153.07	15.3
PKHP-200	Solid phenoxy resin (M.W. @20,000)	30.63	3.1
Z-6040 Silane	Surfactant	10	1.0
TOTALS		999.99	100.00

Table 3

Ingredient Designation	Ingredient Name	Parts	% Solids
BT 2110	Bistriazine resin	84.70	27.59
Epikote 1031	Epoxy resin	3.41	1.85
Epikote 1001	Epoxy resin	22.50	12.22
MEK	Methyl ethyl ketone	25.91	0.00
Vorlöser V 3335	85 wt% solution of Epoxidized phenolic novolac in MEK	33.00	15.20
Martinal TS-601	Aluminum trihydrate	45.50	24.70
PKHS 40	Phenoxy resin	78.90	17.13
BYK-341	Silicon based surfactant	0.55	0.30
Z-6040 Silane	Surfactant	1.86	1.01
Total		296.33	100.00

EXAMPLE 2

The peel strengths of copper foils coated with the resins prepared in Example 1 were evaluated. The adhesive resins prepared in Example 1 were applied to copper foils having a thickness of 18 microns. The copper foils used were supplied by various manufactures. The adhesive resin was applied to the copper foil in a two step process. In the first step, the resin was applied to the copper foil in a layer 35 microns thick. The adhesive resin was b-staged and then second layer of resin 35 microns thick was applied to the b-staged adhesive resin layer and the second layer adhesive resin was partially cured.

The adhesive resin coated foil was laminated to a 8-ply board and then cured at 200°C and at 200 psi for 90 minutes. The copper foil layer was then peeled from the laminate to determine the resin peel strength. Peel strength results are reported in Table 3, below.

Table 3

Foil/Manufacturer	Resin Type	Peel Strength (lbs/in ²)
TWX - Circuit Foils	Compound I	7.0
TWX - Circuit Foils	Compound II	7.45
MLP - Oak Mitsui	Compound I	7.1
MLP - Oak Mitsui	Compound II	7.2
ML - Oak Mitsui	Compound I	4.8
ML - Oak Mitsui	Compound II	5.84
MLS - Oak Mitsui	Compound I	4.65
MLS - Oak Mitsui	Compound II	5
JTCS - Gould	Compound I	4.65
JTCS - Gould	Compound II	4.55
JTCSHP - Gould	Compound I	7.05
JTCSHP - Gould	Compound II	7.19

The peel strength for compound 3 applied to a Circuit Foils VLP 18 micron foil was greater than 5.6 lbs/in². The peel strength results reported in Table 3 and in Figure 2 show that
5 halogen-free resin compositions of this invention provide equal or superior peel strengths in comparison with bromine containing flame retardant resin compositions of the prior art.

We claim:

1. A flame-retardant adhesive resin composition comprising;
at least one resin; and
at least one halogen-free flame retardant composition wherein the resin
5 composition includes essentially no halogen containing flame-retardant compositions.

2. The flame-retardant adhesive resin composition of claim 1 wherein the resin
is an epoxy resin.

3. The flame-retardant adhesive resin composition of claim 1 wherein the
halogen-free flame retardant composition is selected from the group consisting of melamine
10 cyanurate, melamine cyanurate encapsulated red phosphorous, phosphoric acid, 1,3-
phenylenetetraphenyl ester, Di-polyoxyethylene, hydroxymethylphosphonate, aluminum
trihydrate, and mixtures thereof.

4. The flame-retardant adhesive resin composition of claim 1 wherein the
halogen-free flame retardant composition is melamine cyanurate.

15 5. The flame-retardant adhesive resin composition of claim 4 wherein the
melamine cyanurate is present in the composition in an amount ranging from about 10 to
about 20 wt%.

6. The flame-retardant adhesive resin composition of claim 1 wherein the
halogen-free flame retardant is melamine cyanurate which is present in the composition in
20 an amount ranging from about 12 to about 17 wt%.

7. The flame-retardant adhesive resin composition of claim 1 wherein the
halogen-free flame retardant is melamine cyanurate having a particle size of from 1 to about
20 microns.

8. The flame-retardant adhesive resin composition of claim 7 wherein the

melamine cyanurate particle size is less than about 12 microns.

9. The flame-retardant adhesive resin composition comprising at least one resin and from about 12 to about 17 wt % melamine cyanurate having a particle size of from about 1 micron to about 12 microns.

5 10. The flame-retardant adhesive resin composition of claim 1 wherein the halogen-free flame retardant composition is aluminum trihydrate.

11. The flame-retardant adhesive resin composition of claim 10 wherein the aluminum trihydrate is present in the composition in an amount ranging from about 20 to about 30 wt%.

10 12. The flame-retardant adhesive resin composition of claim 10 wherein the aluminum trihydrate is present in the composition in an amount ranging from about 23 to about 28 wt%.

13. The flame-retardant adhesive resin composition of claim 10 wherein the aluminum trihydrate has an average particle size of from 0.1 to about 20 microns.

15 14. The flame-retardant adhesive resin composition of claim 10 wherein the aluminum trihydrate has an average particle size of from about 1 to about 10 microns.

15. The flame-retardant adhesive resin composition of claim 10 wherein the aluminum trihydrate has an average particle size of about 1.5 to about 2.0 microns.

20 16. The flame-retardant adhesive resin composition of claim 10 wherein the aluminum trihydrate has an average particle size of about 1.8 microns.

17. The flame-retardant adhesive resin composition of claim 10 wherein the aluminum trihydrate has the following formula $\text{Al}_2\text{O}_3 \cdot n\text{H}_2\text{O}$ where n ranges from about 2.4 to about 3.

18. The flame-retardant adhesive resin composition of claim 17 wherein n ranges

from about 2.6 to about 2.9.

19. The flame-retardant adhesive resin composition of claim 17 wherein n is about 2.7.

20. An adhesive resin coated conductive metal foil having a first surface and a
5 second surface wherein the first surface includes a flame-retardant resin layer comprising at least one resin, and at least one halogen-free flame retardant composition wherein the resin composition includes essentially no halogen containing flame-retardant compositions.

21. The adhesive resin coated conductive metal foil of claim 20 wherein the conductive metal is copper.

10 22. The adhesive resin coated conductive metal foil of claim 20 wherein the resin has a thickness of from about 35 to about 100 microns.

23. The adhesive resin coated conductive metal foil of claim 20 wherein the resin is applied as a single layer having a thickness of from about 20 to about 100 microns.

24. The adhesive resin coated conductive metal foil of claim 20 wherein the resin
15 layer includes a first resin layer and a second resin layer wherein the first resin layer is at least partially cured before the second resin layer is applied to the top of the first resin layer.

25. The adhesive resin coated conductive metal foil of claim 20 wherein the flame-retardant resin includes at least one epoxy resin.

20 26. The adhesive resin coated conductive metal foil of claim 20 wherein the resin halogen-free flame retardant is selected from the group consisting of melamine cyanurate, melamine cyanurate encapsulated red phosphorous, phosphoric acid, 1,3-phenylenetetraphenyl ester, Di-polyoxyethylene, hydroxymethylphosphonate, aluminum trihydrate, and mixtures thereof.

27. The adhesive resin coated conductive metal foil of claim 20 wherein the halogen-free flame retardant composition is melamine cyanurate.

28. The adhesive resin coated conductive metal foil of claim 20 wherein the halogen-free flame retardant is present in the resin composition in an amount ranging from
5 about 10 to about 30 wt%.

29. The flame-retardant adhesive resin composition of claim 20 wherein the halogen-free flame retardant is melamine cyanurate which is present in the composition in an amount ranging from about 12 to about 17 wt%.

30. The flame-retardant adhesive resin composition of claim 20 wherein the
10 halogen-free flame retardant is melamine cyanurate having a particle size of from 1 to about 20 microns.

31. The flame-retardant adhesive resin composition of claim 30 wherein the melamine cyanurate particle size is less than about 12 microns.

32. The flame-retardant adhesive resin composition of claim 20 comprising at
15 least one resin and from about 12 to about 17 wt % melamine cyanurate having a particle size of from about 1 micron to about 12 microns.

33. The flame-retardant adhesive resin composition of claim 20 wherein the halogen-free flame retardant composition is aluminum trihydrate.

34. The flame-retardant adhesive resin composition of claim 33 wherein the
20 aluminum trihydrate is present in the composition in an amount ranging from about 20 to about 30 wt%.

35. The flame-retardant adhesive resin composition of claim 33 wherein the aluminum trihydrate is present in the composition in an amount ranging from about 23 to about 28 wt%.

36. The flame-retardant adhesive resin composition of claim 20 wherein the aluminum trihydrate has an average particle size of from 0.1 to about 20 microns.

37. The flame-retardant adhesive resin composition of claim 20 wherein the aluminum trihydrate has an average particle size of from about 1 to about 10 microns.

5 38. The flame-retardant adhesive resin composition of claim 20 wherein the aluminum trihydrate has an average particle size of about 1.5 to about 2.0 microns.

39. The flame-retardant adhesive resin composition of claim 20 wherein the aluminum trihydrate has an average particle size of about 1.8 microns.

40. The flame-retardant adhesive resin composition of claim 20 wherein the
10 aluminum trihydrate has the following formula $\text{Al}_2\text{O}_3 \cdot n\text{H}_2\text{O}$ where n ranges from about 2.4 to about 3.


41. The flame-retardant adhesive resin composition of claim 40 wherein n ranges from about 2.6 to about 2.9.

42. The flame-retardant adhesive resin composition of claim 40 wherein n is about
15 2.7.

43. A printed circuit board including the adhesive resin coated conductive metal foil of claim 20.

1/1

FIG. 1

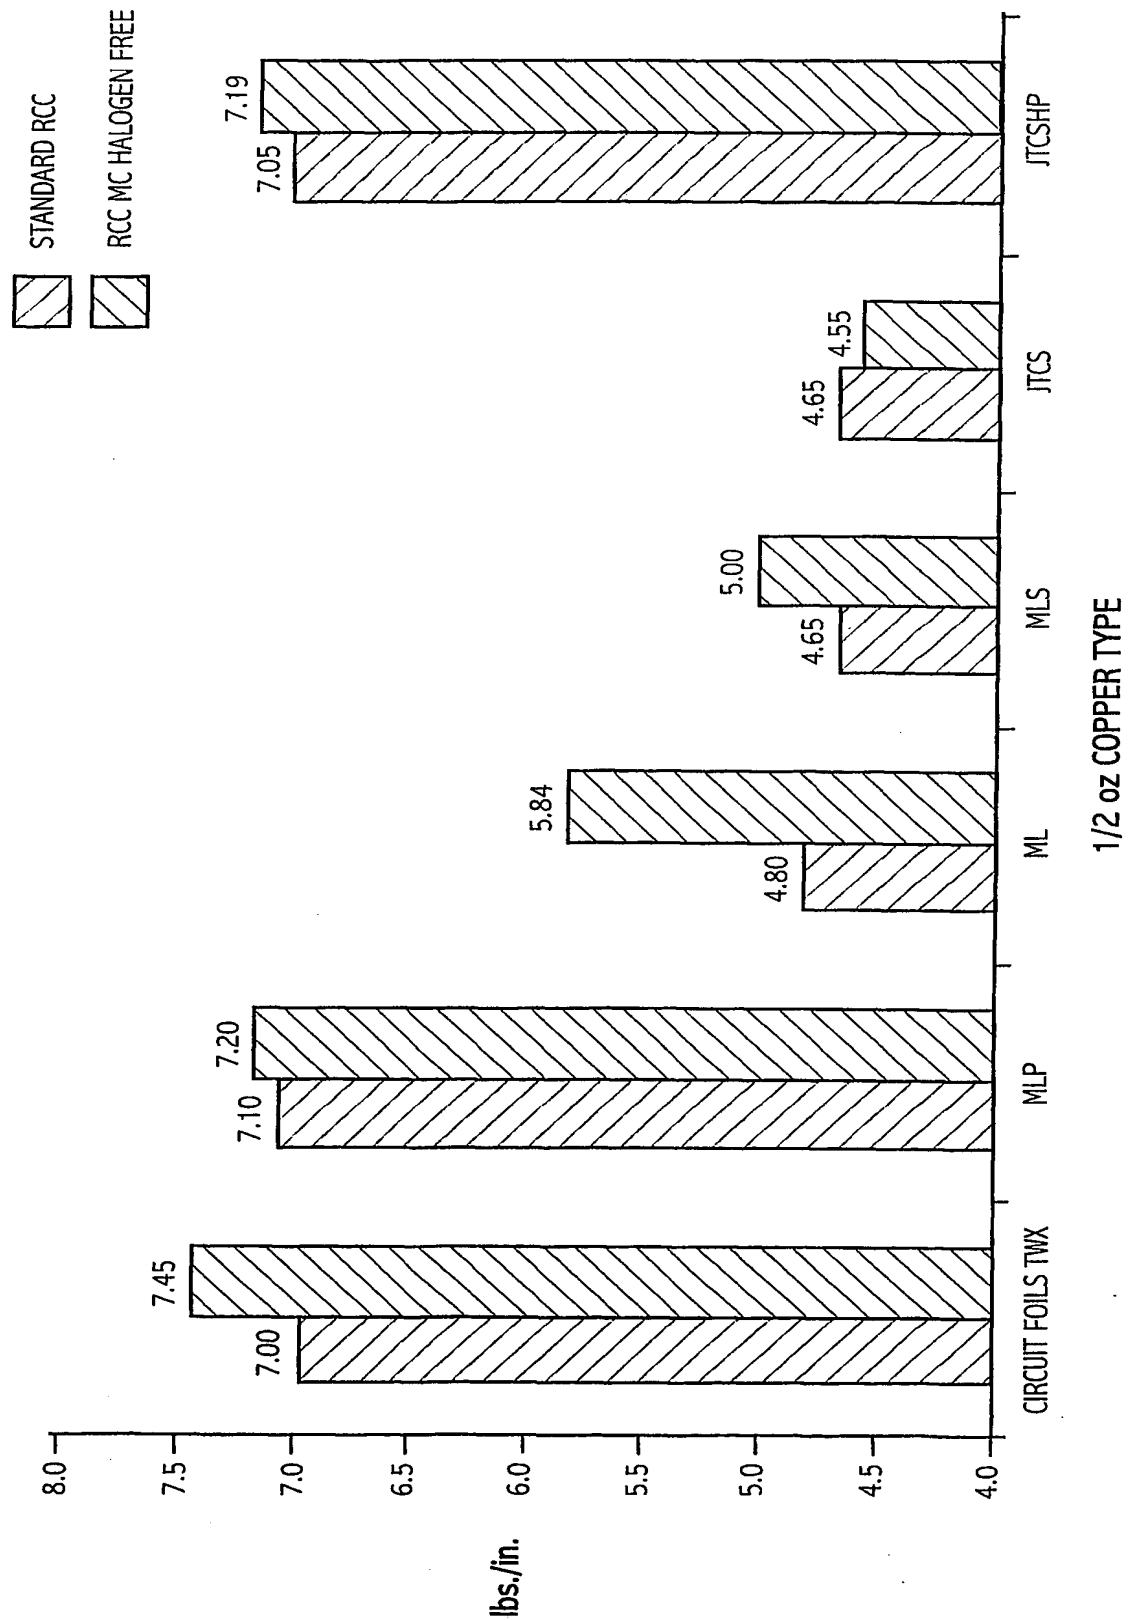

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
11 October 2001 (11.10.2001)

PCT

(10) International Publication Number
WO 01/74960 A3

(51) International Patent Classification⁷: **C09J 163/00**,
11/00, C08K 5/00, 3/00

LaCrosse, WI 54601 (US). **NEHLS, Michael** [DE/DE];
Putzstrasse 4, 52399 Mezenich (DE). **CZERNY, Georg**
[DE/DE]; Merianstrasse 18, 52351 Duren (DE).

(21) International Application Number: PCT/US01/10287

(22) International Filing Date: 30 March 2001 (30.03.2001)

(74) Agent: **HUGHES, A., Blair**; McDonnell Bochnen
Hulbert & Berghoff, 300 S. Wacker Drive, Suite 3200,
Chicago, IL 60606 (US).

(25) Filing Language: English

(81) Designated States (*national*): CN, NO, SG, US.

(26) Publication Language: English

(84) Designated States (*regional*): European patent (AT, BE,
CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC,
NL, PT, SE, TR).

(30) Priority Data:
60/193,971 31 March 2000 (31.03.2000) US
09/716,067 17 November 2000 (17.11.2000) US

Published:
— with international search report

(71) Applicant (*for all designated States except US*): **ISOLA
LAMINATE SYSTEMS, CORP.** [US/US]; 230 N. Front
Street, P.O. Box 1448, LaCrosse, WI 54602 (US).

(88) Date of publication of the international search report:
28 March 2002

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **CHOATE, Martin**,
T. [US/US]; 1500 Rambler Court, Onalaska, WI 54650
(US). **ORMOND, Barbara** [US/US]; 1326 Adams Street,

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*



WO 01/74960 A3

(54) Title: HALOGEN FREE FLAME RETARDANT ADHESIVE RESIN COATED COMPOSITE

(57) Abstract: Fire resistant adhesive resins that include a halogen-free and bromine-free flame retardant ingredient and conductive foils coated with the halogen-free fire resistant adhesive resin coated compositions of this invention as well as printed circuit boards manufactured using the adhesive resin coated conductive foils.

INTERNATIONAL SEARCH REPORT

Int. Application No.

PLI/US 01/10287

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 C09J163/00 C09J11/00 C08K5/00 C08K3/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 C09J C08K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DATABASE WPI Section Ch, Week 200008 Derwent Publications Ltd., London, GB; Class A85, AN 2000-092081 XP002183169 & JP 11 333974 A (SHIN KOBE ELECTRIC MACHINERY), 7 December 1999 (1999-12-07) abstract	1-43
X	DATABASE WPI Section Ch, Week 199819 Derwent Publications Ltd., London, GB; Class A21, AN 1998-212941 XP002183170 & JP 10 060229 A (TOSHIBA CHEM CORP), 3 March 1998 (1998-03-03) abstract	1-43



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *G* document member of the same patent family

Date of the actual completion of the international search

16 November 2001

Date of mailing of the international search report

06/12/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Deraedt, G

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 01/10287

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category ~	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 40 40 276 A (CHEMIE LINZ DEUTSCHLAND) 25 June 1992 (1992-06-25) page 2, line 43 - line 52; claims; examples ----	1, 3-24, 26-43
X	EP 0 763 566 A (TOSHIBA CHEM CORP) 19 March 1997 (1997-03-19) claims ----	1-3, 20-26
X	EP 0 451 101 A (CIBA GEIGY AG) 9 October 1991 (1991-10-09) claims; examples ----	1-3, 10-26, 33-43
X	EP 0 795 570 A (TOSHIBA CHEM CORP) 17 September 1997 (1997-09-17) claims -----	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

Inventor's Application No

PCT/US 01/10287

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
JP 11333974	A	07-12-1999	NONE	
JP 10060229	A	03-03-1998	NONE	
DE 4040276	A	25-06-1992	DE 4040276 A1	25-06-1992
EP 0763566	A	19-03-1997	JP 2679005 B2	19-11-1997
			JP 8244166 A	24-09-1996
			JP 8276532 A	22-10-1996
			EP 0763566 A1	19-03-1997
			US 5994429 A	30-11-1999
			CN 1148402 A ,B	23-04-1997
			WO 9628511 A1	19-09-1996
EP 0451101	A	09-10-1991	CA 2039468 A1	04-10-1991
			EP 0451101 A2	09-10-1991
			JP 4234893 A	24-08-1992
			US 5102932 A	07-04-1992
EP 0795570	A	17-09-1997	WO 9712925 A1	10-04-1997
			EP 0795570 A1	17-09-1997
			KR 228047 B1	01-11-1999
			US 6214455 B1	10-04-2001
			US 5955184 A	21-09-1999